

06-02-00

A

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

1c339 U.S. PTO
06/01/00

Applicant: Vexler, et al.
Serial No. To be assigned
Filed: 1 June 2000 Docket No. 736.321US01
Title: TWISTED PAIR CABLE WITH DUAL LAYER INSULATION HAVING IMPROVED TRANSMISSION CHARACTERISTICS

1c571 U.S. PTO
09/585072
06/01/00

CERTIFICATE UNDER 37 C.F.R. 1.10:
'Express Mail' mailing number: EL477365839US
Date of Deposit: 1 June 2000
The undersigned hereby certifies that this Transmittal Letter and the paper or fee, as described herein, are being deposited with the United States Postal Service 'Express Mail Post Office To Addressee' service under 37 CFR 1.10 and is addressed to the Assistant Commissioner for Patents, Washington, D.C. 20231
By: Theresa Jurek
Theresa Jurek

Box PATENT APPLICATION
Assistant Commissioner for Patents
Washington, D.C. 20231

- Patent application including 10 pages of specification, 16 claims and 1 page of abstract
- Signed Declaration and Power of Attorney
- Assignment to BH CUSTOM CABLES CANADA INC., Recordation Form Cover Sheet, Check for \$40
- 2 sheets of formal drawings
- Check(s) in the amount of \$384.00 for Filing Fees
- Other: Verified Statement Claiming Small Entity Status, Associate Power of Attorney
- Transmittal Sheet
- Return postcard

CLAIMS FILED					
	Total Claims	In Excess of	Extra Claims Present	Rate	Fees
Basic Filing Fee					\$ 345.00
Total Claims	16	20		X \$9.00	\$
Indep. Claims	4	3	1	X \$39.00	\$ 39.00
Multiply Dependent Claims					\$
TOTAL FEES					\$ 384.00

Authorization is hereby given to charge any additional fees or credit any overpayments that may be deemed necessary to Deposit Account Number 50-1038.

Respectfully submitted,

ALTERA LAW GROUP, LLC
10749/Bren Road East
Minneapolis, MN 55343-9056
(612) 912-0527

Dated: 1 June 2000

Michael B. Lasky
Atty. Reg. Number 29,555
MBL/mka

06/01/00 09:58:00

Applicant or Patentee: Gavriel VEXLER et al.
Serial or Patent No.: _____ No.: _____
Filed or Issued: _____
For: TWISTED PAIR CABLE WITH DUAL LAYER INSULATION HAVING IMPROVED TRANSMISSION CHARACTERISTICS

**VERIFIED STATEMENT (DECLARATION) CLAIMING SMALL ENTITY STATUS
(37 CFR 1.9(f) and 1.27(c)) - SMALL BUSINESS CONCERN**

I hereby declare that I am:
 the owner of the small business concern identified below:
 an official of the small business concern empowered to act on behalf
of the concern identified below:

NAME OF CONCERN: BN CUSTOM CABLES CANADA INC.
ADDRESS OF CONCERN: 212 Notre-Dame Road (Road 203), St-Chrysostome, Quebec, CANADA, J0S 1R0

I hereby declare that the above identified small business concern qualifies as a small business concern as defined in 13 CFR 121.1301 through 121.1305, and reproduced in 37 CFR 1.9(d), for purposes of paying reduced fees under section 41(a) and (b) of Title 35, United States Code, in that the number of employees of the concern, including those of its affiliates, does not exceed 500 persons. For purposes of this statement, (1) the number of employees of the business concern is the average over the previous fiscal year of the concern of the persons employed on a full-time, part-time or temporary basis during each of the pay periods of the fiscal year, and (2) concerns are affiliates of each other when either, directly or indirectly, one concern controls or has the power to control the other, or a third party or parties controls or has the power to control both.

I hereby declare that rights under contract or law have been conveyed to and remain with the small business concern identified above with regard to the invention, entitled TWISTED PAIR CABLE WITH DUAL LAYER INSULATION HAVING IMPROVED TRANSMISSION CHARACTERISTICS by inventor(s) Gavriel VEXLER and Gilles GAGNON described in:

the specification filed herewith
 application serial No. _____ filed on _____
 patent No. _____ issued on _____

If the rights held by the above identified small business concern are not exclusive, each individual, concern or organization having rights in the invention is listed below* and no rights to the invention are held by any person, other than the inventor, who could not qualify as an independent inventor under 37 CFR 1.9(c) if that person made the invention, or by any concern which would not qualify as a small business concern under 37 CFR 1.9(d) or a nonprofit organization under 37 CFR 1.9(e).

*NOTE: Separate verified statements are required from each named person, concern or organization having rights to the invention averring to their status as small entities. (37 CFR 1.27)


NAME _____
ADDRESS _____
 INDIVIDUAL SMALL BUSINESS CONCERN NONPROFIT ORGANIZATION

See attached sheet for additional person(s), concern(s) or organization(s)

I acknowledge the duty to file, in this application or patent, notification of any change in status resulting in loss of entitlement to small entity status prior to paying, or at the time of paying, the earliest of the issue fee or any maintenance fee due after the date on which status as a small entity is no longer appropriate. (37 CFR 1.28(b)).

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willfull false statements and the like so made are punishable by fine or imprisonment, or both, under section 1001 of Title 18 of the United States Code, and that such wilful false statements may jeopardise the validity of the application, any patent issuing thereon, or any patent to which this verified statement is directed.

NAME OF PERSON SIGNING: GILLES GAGNON
TITLE OF PERSON OTHER THAN OWNER PRESIDENT
ADDRESS OF PERSON SIGNING 27, DE SAVERNE LORRAINE, QUEBEC CANADA

SIGNATURE  DATE: May 18, 2000

**TWISTED PAIR CABLE WITH DUAL LAYER INSULATION HAVING
IMPROVED TRANSMISSION CHARACTERISTICS**

Field of the invention

5

The present invention relates to twisted pair cables which can be used in high frequency applications.

Description of the prior art

10

Twisted pair cables have become the physical media of choice for local area networks in the last 10 years. The current EIA/TIA 568 A Category 5 specifications (and the associated addenda) for these cables call for performance up to a frequency of 100 MHz.

15

Installed transmission systems were, until recently, operating only at 10 Mbit/s and did not use all the available bandwidth offered by cables meeting the existing specifications. In fact, the Ethernet protocol used in over 70% of the installed networks, employs only two pairs of the available four and uses half-duplex transmission, i.e. one pair is transmitting while the other is receiving.

20

In the last five years, new transmission technology, operating at 100 Mbit/s has been rapidly expanding in the marketplace. At the same time, improved cables with transmission characteristics exceeding the current EIA/TIA 568 A Category 5 specifications (and the associated addenda) were also developed. Despite the assurance of performance promised by the existing specifications, cable manufacturers have developed cables with improved performance as an insurance policy for future applications. In addition, process variation during the manufacture of the cable and further handling during installation were causing deterioration in cable performance, thus the requirement of transmission characteristics that exceeded the current specifications.

25

30

More recently, new data transmission technology has indeed pushed the speed limit to 1 Gigabit/s and higher. This transmission technology and some of the existing 100 Mbit/s transmission technologies, when applied to twisted pair

cables, require the use of all four pairs in a cable in duplex operation (bi-directional transmission). These new protocols have increased noticeably the transmission performance requirements of the twisted pair wire cables beyond the EIA/TIA 568 A Category 5 specifications (and the associated addenda).

5 In the first place, the delay skew or the differential in the signal velocity amongst the 4 pairs has to be minimal in order to enable fast de-scrambling of the four bit signals into a coherent bit sequence at the receiving end.

 Additional capabilities for bi-directional transmission are also required in order to obtain the maximum bandwidth available on a 4-pair twisted cable. This
10 last requirement introduces the possibility of multi-pair power sum near end, equal level far end and multi-pair power sum equal level far end cross-talk, as well as the increased possibility that return loss (due to impedance irregularities) will impair transmission. Twisted pair cables have to be designed with low and uniform near and far end cross-talk and, consequently, low power sum cross-talk, equal level
15 (less the attenuation) far end and power sum equal level far end cross-talk.

 Recent Category 5E addenda to the EIA/TIA 568 A specifications has taken into account these new requirements. However, there is no consensus yet on the specifications for a twisted pair cable that will meet the requirements for beyond 1 Gbit/s transmission. The first draft C1 for such a new specification introduces the
20 new Category 6 cabling system and has its ISO counterpart draft specification (ISO/IEC SC25 WG3 Proposal).

 There are already in the marketplace several cable designs that claim to meet and even exceed the proposed Category 6 specifications. The first cable design that claims gigabit capability was developed by Belden Wire & Cable
25 Company (US pat. no. 5,606,151 to Siekierka et al.) and uses the joining of the two insulated conductors in a pair by means of an adhesive or by co-extruding the two insulated conductors with a very small joining web. This device is meant to mainly improve the longitudinal impedance uniformity to less than +/-15 ohm and, as a result, to minimise return loss impairments of the resulting 4 pair twisted
30 cable. The claimed reason for the observed reduction in impedance irregularities is explained by the fact that cyclical and random irregularities that can be imparted in the twisted pair during the twisting process due to differences in twisting tension

are eliminated when the bonded pairs are twisted together. It is also claimed that the cable resists deformation during process handling and installation.

In addition, the cable described in this patent uses a crescent cable structure whereby each pair is secured in a single tube-like slot. The manufacturer claims improved near end and far end cross-talk performance for this design. However, this structure is exceedingly difficult to manufacture as each tube-like slot cannot have even the smallest variations in diameter without a marked deterioration of the electrical characteristics. When cables are stacked together in installations, there are also greater chances for inter cable cross-talk impairments due to the proximity of pairs with same twisting lays separated only by the jacket thickness. The bonded pairs are also difficult to strip and install. This design does not impart any additional advantage as far as the reduction of cross-talk impairments is concerned. It also does not eliminate impedance variations that can be caused by off centre, oval or otherwise irregularly shaped insulation.

US pat. no. 5,767,441 to Brorein et al. claims to eliminate such impedance variations through the pre-twisting of insulated conductors prior to twisting the insulated conductors in double twist machines or by twisting the pairs through a single twist process. This process has unleashed a flood of equipment designed to impart back-twist capabilities for manufacturers of high performance cables. In addition, this patent discloses a flat cable structure, similar to the cable described in the previous patent. The manufacturing process of this cable is also prone to cause small variations in the pair slot dimensions, thus compromising the transmission performance of the resulting 4-pair cable. In addition, the structure of these flat cable designs may pose additional transmission problems, due to inter-cable cross-talk or "alien cross-talk" that cannot be cancelled electronically through DSP filtering.

Another solution to gigabit performance requirements has been put forth by the proponents of cables with central members whereby the twisted pairs are separated by means of a longitudinal central member (CommScope Isolator™ design, Hitachi Manchester's HI-NET™ and other designs). This design affords the greatest reduction of cross-talk impairments but does not eliminate impedance irregularities. The insertion of a central member with the four pairs symmetrically

disposed around it is difficult to achieve and slows down the manufacturing processes. In addition, the cable diameter is increased by at least 20%. The overall cost of the cable is also substantially increased due to the additional cost of the center member and higher jacketing material costs.

5

Summary of the invention

It is the object of this invention to eliminate many of the difficulties inherent in the cables of the prior art while substantially reducing both cross-talk impairments and impedance irregularities in a cost competitive manner respectful of the EIA/TIA specifications.

In accordance with the invention, this object is achieved with a twisted pair cable comprising a plurality of pairs, each of said pairs comprising two conductors, each of said conductors is covered with an inner layer insulator and an outer layer insulator, said conductors being eccentric with respect to the overall insulation of said inner and outer layer insulator.

The present invention also concerns a method for making the same.

Brief description of the drawings

The present invention and its advantages will be more easily understood after reading the following non-restrictive description of preferred embodiments thereof, made with reference to the following drawings in which:

Figure 1 is a cross-sectional representation of a conductor of a twisted pair cable according to a preferred embodiment of the present invention;

Figure 2a is a cross-sectional representation of a conductor of a twisted pair cable according to another preferred embodiment of the present invention;

Figure 2b is a cross-sectional representation of a conductor of a twisted pair cable according to yet another preferred embodiment of the present invention;

Figure 3 is a schematic representation of the stretching and the twisting of two conductors to form twisted pair cable according to a preferred embodiment of the present invention;

Figure 4a is a schematic representation of the eccentricity of the conductors with respect to the insulation according to a preferred embodiment of the present invention; and

5 Figure 4b is a schematic representation of a twisted pair cable according to the prior art.

Description of a preferred embodiment of the invention

10 As mentioned above, the present invention concerns a cable which eliminates many of the difficulties inherent in the cables of the prior art while substantially reducing both cross-talk impairments and impedance irregularities in a cost competitive manner respectful of the EIA/TIA specifications discussed above.

15 In accordance with a broad aspect of the invention, the cable of the present invention comprises a plurality of pairs. Each pair comprises two conductors 11, each conductor comprising an inner layer insulator 13 and an outer layer insulator 15. The conductors 11 are eccentric with respect to the overall insulation dimension, as clearly shown in Fig. 4a. Consequently, referring now to Fig. 4a, the conductors 11 are separated by a distance S1 which is smaller than the
20 separators S2 of conductors 11 in adjacent pairs. Stated another way, the conductors 11 are asymmetric, such that the conductors 11 are closer to each other in a pair than to conductors 11 in adjacent pairs in contact at the outer surface opposite the conductors 11.

25 In a preferred aspect of the invention, each conductor 11 is provided with an inner layer insulator 13, and an outer layer insulation 15. Preferably, one of the layers has a first modulus of elasticity, and the other layer has a second modulus of elasticity, where the first modulus is greater than the second modulus. Consequently, in order to obtain the cable of the present invention, a twisted pair
30 cable is provided comprising of conductors insulated with a thick inner layer and a thinner outer layer (**see Fig. 1**). The inner dielectric layer 13 can be chosen from a group of extrudable polymers that have a modulus of elasticity exceeding 64 Kpsi at room temperature, a dielectric constant lower than 2.5 and a loss factor lower

than 0.0003 when tested from 1 MHz to 1 GHz. The outer dielectric layer 15 is chosen from another group of extrudable polymers, also called thermoplastic elastomers, that have a modulus of elasticity below 35 Kpsi at room temperature and similar but not necessarily better electrical characteristics. **(See Fig 1)**

5 In another embodiment of this disclosure, a thinner inner dielectric layer 13 is chosen from the group of elastomers, while the relatively high elastic modulus polymers are applied as a thicker outer layer 15. **(See Fig 2a)**

10 In a third embodiment of this disclosure, a inner dielectric 13 is chosen from the group of elastomers the relatively high elastic modulus polymers is applied as an intermediary layer 15 and an outer layer 17 is chosen from the same group of extrudable elastomers, as the inner dielectric 13. **(See Fig 2b)**

15 One major mechanical characteristics of elastomers is their capacity to undergo relatively high strain in the elastic domain under relatively low mechanical stress and achieve complete recovery following the release of the stress. Conversely, for high modulus materials, there is a small strain domain where the material behaves elastically under relatively high stress; beyond that domain, the high modulus materials deform permanently or plastically.

20 The present invention takes advantage of the presence of an elastomer as the outer or the inner layer of the insulated conductor, and possibly in both outer and inner layer of a three layered insulation, to create, during the process of pair twisting and pair assembly, a structure that is mechanically pre-stressed and will resist further deformations. The resulting cable will have reduced cross-talk impairments and impedance irregularities and will maintain its characteristics following packaging and installation.

25 During the twisting action, when the individual insulated conductors come into contact, the elastomer outer layer is constrained into the high modulus inner layer following the overall ductile deformation of the copper conductors. As better shown in Fig. 3, the conductors 11 provided with the insulations are subjected to longitudinal forces **F11** and **F21**, and lateral forces **F12** and **F22** at the twisting apparatus pay-offs.

30 While the perpendicular tensions **F12**, **F22** resultant during the process are too small to effect a significant elastic deformation of the high modulus layer, the

elastomer layer can be readily deformed to effect a permanent deformation that is still in the elastic domain following the twisting process. Thus, the twisted pair constructed as described above constitutes, within given boundaries of flexing of the twisting strand, a mechanically pre-stressed structure and will resist further deformations.

It was found that, in order to obtain the advantages disclosed in the present application, the outer or the inner thin elastomer layer thickness is preferably at least 15% of the overall insulation thickness. This is also the case when the twisted pair cable includes an inner and the outer elastomer layer and a middle extrudable polymer layer. Consequently, the combined thickness of the inner and outer elastomer layers is preferably at least 15% of overall insulation thickness. The intensity of the forces **F11**, **F12**, **F21**, **F22** in play on the individual conductors and the twisted pair during the manufacturing process are also important in obtaining the disclosed advantages. It should be noted that the series of forces **F11** and **F21** is equivalent to the resulting force **F0**.

The structure of the resulting twisted pair, as disclosed above, is asymmetric i.e.: the separation **S₁** between the two conductors in a pair is smaller than the separation **S₂** between the two conductors of an adjacent pair (**Fig. 4a**). In the known art, twisted pairs of perfectly centred insulated conductors have a symmetrical structure whereby the separation **S₁** between the two conductors in a pair is equal to the separation **S₂** between the two conductors of an adjacent pair (**Fig. 4b**).

The immediate advantage of such a pair structure is that, while the impedance of the proposed cable is equivalent to a cable of identical conductor separation, the separation between the pairs of the proposed cable exceed the norm in a cable with symmetrical pair structure. The higher separation between pairs induces tangible electrical performance improvements that result in a cable with reduced cross-talk impairments and lower signal attenuation. Both reductions contribute to a much improved signal to noise performance of the resulting cable. For example, an experimental cable with a 0.008" overall insulation thickness having a 0.003" outer elastomer layer and a 0.036" overall diameter has shown an improvement of at least 35% in the near end cross-talk (normal scale) when

compared with a standard cable of same construction in a frequency range from 1 to 300 MHz.

5 The inherent advantages of the proposed cable are not limited to the improvement of the final cable cross-talk and attenuation characteristics. The presence of an elastomer layer in the insulated conductor constitutes a definite advantage during the subsequent processing stages of the cable. During the insulation process, the elastomer layer will cushion the unavoidable variations in tension generated during the spooling of the insulated conductor into the take-up reels. In addition, better spooling of the insulated conductor is obtained on the take-up reels. Subsequently, the twisting process is helped by the better spooling that will lower the variation in pay-off speeds between the two individual insulated conductors of the pair. More importantly, the unavoidable variations in tension, caused by speed differences and irregularities in the mechanical devices during the twisting, are absorbed by the elastomer layers and limit the dimensional variations to the thickness of an elastomer layer. Consequently, the proposed cable has very stable input impedance as a function of the frequency from 0.772 to 350 MHz due to the limitation in the possible variation of the separation between the conductors S_1 that is limited to the elastomer layer thickness. This variation does not exceed 0.0002". Prior art (US patent no. 5,606,151) has shown that such a variation will result in a 6 ohms impedance variation, well below the maximum +/- 15 ohms specified by the EIA/TIA specifications. The impedance stability is also reflected in the fact that the return loss of the proposed cable is very low without any backtwisting of the insulated conductors. Experimental results have shown, in fact, that there is little discernible difference between backtwisted insulated conductors and non-backtwisted ones.

25 It was also shown that by varying the twisting tension, one can obtain the same results as above with thinner elastomer layers. This unexpected property can provide the designer with the ability to develop a cable with perfectly balanced impedance properties without varying the overall diameter of the insulated conductor.

30 Unexpectedly, the proposed cable has also very low delay skew i.e. the difference between the propagation speed in the four pairs is minimal, well below

the required by the same C1 draft. This characteristic is reflected in the fact that the pairs signal attenuation curves are almost identical. As mentioned in the background of the invention, a low delay skew is essential for the operation of bi-directional transmission protocols.

5 The overall transmission characteristics of the proposed cable are within the requirements of the latest draft C1 of the proposed Category 6 addendum to the TIA/EIA 568 A.

10 The elastomer layer can also be used as a carrier for colour and flame retardant additives (but only when the elastomer layer is the outer layer). By doing so, an additional improvement in the electrical performance of the cable will be obtained at a lower cost in additives that otherwise are dispersed in the entire insulation. In a preferred embodiment, the inner layer elastomer will incorporate particles of inorganic flame retardants or other flame retardant polymer having excellent dielectric capabilities and the outer layer will be a flame retardant polymer with low dielectric constant and loss factor.

15 In addition, the elastomer layer can be foamed in order to reduce the signal attenuation of the individual pair and of the resulting 4 pair cable. Foaming will also increase the compressibility of elastomer layer, thus increasing the asymmetry of the twisted pairs. It was disclosed above that this feature of the present disclosure contributes to the reduction in cross-talk impairments.

20 An additional embodiment of the disclosure is a foam-skin insulated conductor that is composed of a first foamed layer and a second elastomer layer with a very low elastic - 15 Kpsi and lower - modulus. The mechanical fragility of traditional foam-skin insulation designs is well known. In the proposed design, the elastomer skin layer acts as a cushion that mechanically protects the fragile foam layer during the subsequent process stages.

25 The use of the above asymmetrical pair design in the STP (Shielded Twisted Pair) and ScTP (screened twisted pair) cable is an additional advantageous application of the concept. An asymmetric pair surrounded by a metallic shielded film will have lower attenuation, and better impedance stability that a standard pair structure. In recent STP cable designs, foam is the

30

recommended insulation. Thus, the elastomer top layer will be helpful in protecting the foamed layer as disclosed above.

Another potential application of the asymmetric pair concept is in the area of multi-pair outside plant cables. The widespread penetration of the Internet has raised the bandwidth requirements of the existing telephone network. Solutions for the trunk section of the network are available in the form of the fibre and or fibre/coax technology. The distribution to single residences and small offices is more problematic given the enormous cost involved in the complete conversion to fibre. Upgrading the capability of outside plant copper based drop wires is a very attractive cost effective solution. Drop wires incorporating the asymmetric pair concept will considerably increase the bandwidth of the resulting multi-pair outside plant cables, especially the ones incorporating a metallic screen.

It should be understood that one important aspect of the invention is the use of two different insulator layers, one of which can undergo a permanent deformation under predetermined conditions, while the other layer does not undergo a permanent deformation. Although preferred materials have been described herein, it should be apparent to a person skilled in the art that other materials can be used and which will meet the object of the invention.

Although the present invention has been explained hereinabove by way of a preferred embodiment thereof, it should be pointed out that any modifications to this preferred embodiment within the scope of the appended claims is not deemed to alter or change the nature and scope of the present invention.

CLAIMS

1. A twisted pair cable comprising a plurality of pairs, each of said pairs comprising:
5 two conductors, each of said conductors being covered with an inner layer insulator and an outer layer insulator, said conductors being eccentric with respect to the overall insulation of said inner and outer layer insulator.
- 10 2. A twisted pair cable comprising a plurality of pairs, each of said pairs comprising:
two conductors, each of said conductors being covered with an inner layer insulator and an outer layer insulator, said conductors being separated by a distance S1 which is smaller than the separation S2 of conductors in adjacent pairs.
- 15 3. A twisted pair cable comprising a plurality of pairs, each of said pairs comprising two conductors, each of said conductors being covered with an inner layer insulator and an outer layer insulator defining an outer surface, said conductors being asymmetric such that said conductors are closer to each other than to conductors in adjacent pairs in contact at the outer surface opposite said conductors.
- 20 4. A twisted pair cable according to claim 1, wherein said conductors are closer to each other than to an outer surface opposite said conductors.
- 25 5. A twisted pair cable according to claim 4, wherein said inner insulator is an extrudable polymer, and wherein said outer insulator is an extrudable elastomer.
- 30 6. A twisted pair cable according to claim 5, wherein said extrudable polymer has a modulus of elasticity greater than 64 Kpsi at room temperature, a dielectric constant lower than 2.5 and a loss factor lower than 0.0003

between 1 MHz and 1GHz; and wherein said elastomer has a modulus of elasticity lower than 35 Kpsi at room temperature.

- 5 7. A twisted pair cable according to claim 4, wherein said inner insulator is an extrudable elastomer and wherein said outer insulator is an extrudable polymer.
- 10 8. A twisted pair cable according to claim 7, wherein said extrudable polymer has a modulus of elasticity greater than 64 Kpsi at room temperature, a dielectric constant lower than 2.5 and a loss factor lower than 0.0003 between 1 MHz and 1GHz; and wherein said elastomer has a modulus of elasticity lower than 35 Kpsi at room temperature.
- 15 9. A twisted pair cable according to claim 4, wherein each of said conductors further comprise a middle layer insulator, said inner and outer layer insulators being an extrudable elastomer and wherein said middle layer insulator is an extrudable polymer.
- 20 10. A twisted pair cable according to claim 5, wherein said extrudable elastomer further includes a carrier for color and flame retardant additives.
11. A twisted pair cable according to claim 5, wherein said elastomer is foamed.
- 25 12. A twisted pair cable according to claim 1, wherein said elastomer is foamed.
13. A twisted pair cable according to claim 5, wherein said extrudable polymer is foamed, and wherein said elastomer has a modulus of elasticity lower than 35 Kpsi at room temperature.
- 30 14. A twisted pair cable according to claim 7, wherein said elastomer and said extrudable polymer are foamed.

15. A twisted pair cable according to claim 5, wherein said elastomer thickness is greater than 15 % of the overall insulation thickness.

16. A method for making a twisted pair cable comprising:

- 5
- (a) providing a first and a second conductor, each of said first and said second conductor being insulated with an inner insulator and an outer insulator, one of said inner and outer insulator having a modulus of elasticity lower than 35 Kpsi at room temperature, the other of said inner and outer insulator having a modulus of elasticity

10

 - (b) stretching said first and second conductor at a sufficient angle and by an amount sufficient to effect a permanent deformation of the insulator having the lower modulus of elasticity, but not enough to effect a permanent deformation of the insulator having the higher modulus of elasticity; and

15

 - (c) twisting said first and second conductors together; and
 - (d) manufacturing a cable with a plurality of said pairs.

004907205956

ABSTRACT

5 The present invention concerns a twisted pair cable which eliminates many of the
difficulties inherent in the cables of the prior art while substantially reducing both
cross-talk impairments and impedance irregularities in a cost competitive manner
respectful of the EIA/TIA specifications. The twisted pair cable of the invention
includes a plurality of pairs, each of the pairs having two conductors. Each of the
conductors is covered with an inner layer insulator and an outer layer insulator.

10 The invention lies in positioning the conductors within the insulation layers so that
the conductors are eccentric with respect to the overall insulation of the inner and
outer layer insulators. The present invention also concerns a method for making
the same.

66750 629690

000090 209880

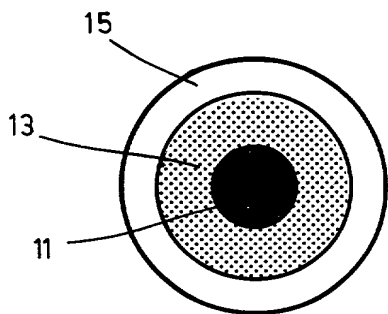


FIG. 1

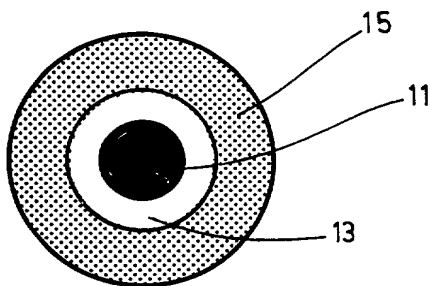


FIG. 2a

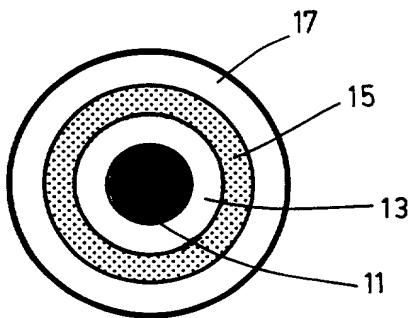


FIG. 2b

004090 22098560

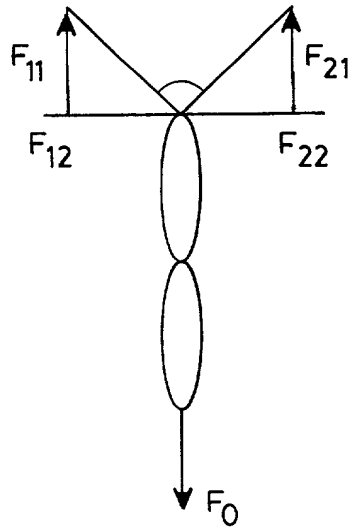


FIG. 3

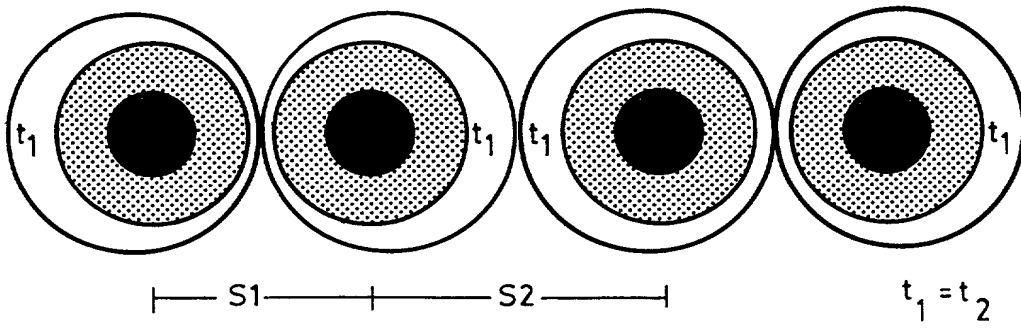


FIG. 4a

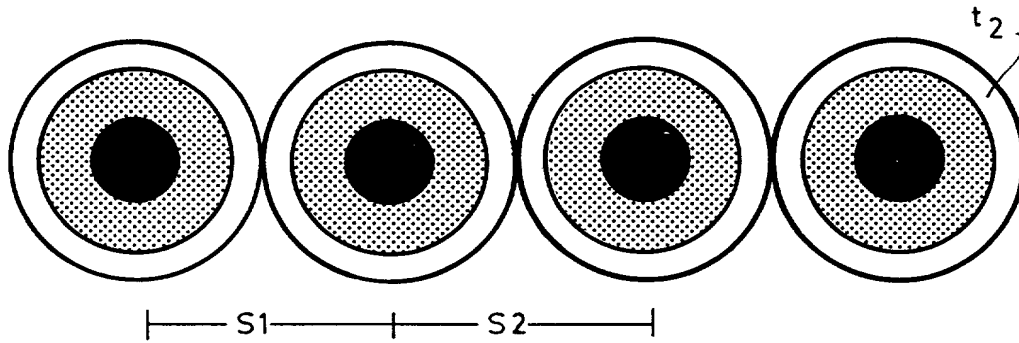


FIG. 4b
(PRIOR ART)

DECLARATION FOR PATENT APPLICATION

As a below named inventor, I (we) hereby declare that my (our) residence, post office address and citizenship are as stated below next to my (our) name; I (we) believe that I am (we are) the original, first and sole inventor(s) (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention (Design, if applicable) entitled:

TWISTED PAIR CABLE WITH DUAL LAYER INSULATION HAVING IMPROVED TRANSMISSION CHARACTERISTICS

the specification of which (check one): is attached hereto; _____ was filed on _____ as application serial No. _____ and was amended on (or amended through) _____ (if applicable); was filed on _____ as International Application (PCT) No. _____ and amended on _____ (if applicable). I (we) hereby state that I (we) have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment(s) referred to above. I (we) acknowledge the duty to disclose information known by me (us) to be material to the patentability of my (our) invention in accordance with Title 37, Code of Federal Regulations, § 1.56(a). I (we) hereby claim foreign priority benefits under Title 35, United States Code § 119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application which priority is claimed.

I (We) hereby claim foreign priority benefits under Title 35, United States Code § 119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application which priority is claimed.

Prior Foreign Application(s)	Priority Claimed
------------------------------	------------------

(Number)	(Country)	(Day/Month/Year Filed)	YES	NO

I (we) hereby claim the benefit under Title 35, United States Code, § 120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code § 112, I (we) acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, § 1.56 which occurred between the filing date of the prior art application and the national or PCT international filing date of this application:


(Appl. No.)	(Filing date)	(Status-Patented,Pending or Aband.)


I (we) hereby declare that all statements made herein of my (our) own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

POWER OF ATTORNEY: I (we) hereby appoint as my (our) attorneys, with full powers of substitution and revocation, to prosecute this application and transact all business in the Patent and Trademark Office connected therewith.

Garabed NAHABEDIAN (Reg. No. 29,507); Thierry ORLHAC (Reg. No. 29,497); Alain PROVOST (Reg. No. 33,143), Nathalie JODOIN (Reg. No. 41,558), Louis-Pierre GRAVELLE (Reg. No. 44,429) and Luc MORIN (Reg. No. 44,430), whose professional address is 55 St Jacques, Montreal, Quebec, Canada, H2Y 3X2.

00000000000000

Full name of First or Sole Inventor Gavriel VEXLER	Citizenship Canadian
Residence Address-Street 4371 Montrose Ave	Post Office Address-Street 4371 Montrose Ave
City Westmount	City Westmount
State or Country Zip Québec, CANADA, H3Y 2B2	State or Country Zip Québec, CANADA, H3Y 2B2
Date 18 / May / 2000	Signature 

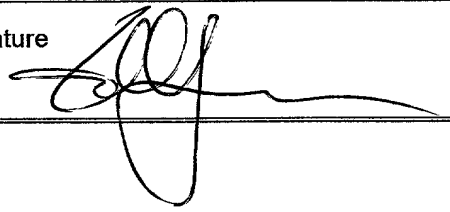Full name of second Inventor Gilles GAGNON	Citizenship Canadian
Residence Address-Street 27 de Saverne	Post Office Address-Street 27 de Saverne
City Lorraine	City Lorraine
State or Country Zip Québec, CANADA, J6Z 2V4	State or Country Zip Québec, CANADA, J6Z 2V4
Date 18 May 2000	Signature 

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re Application of **Gavriel VEXLER et al.**

Assignee: **BN CUSTOM CABLES CANADA INC.**

Application filed: **herewith**

For: **TWISTED PAIR CABLE WITH DUAL LAYER INSULATION
HAVING IMPROVED TRANSMISSION CHARACTERISTICS**

ASSOCIATE POWER OF ATTORNEY

Hon. Commissioner of Patents and Trademarks
Washington, D.C. 20231
U.S.A.

Sir:


Please recognize as my associate attorneys in the above-identified application Steven R. Funk, Reg. No. 37,830, Michael B. Lasky, Reg. No. 29,555, Iain A. McIntyre, Reg. No. 40,337, David W. Lynch, Reg. No. 36,204, and Karen D. McDaniel, Reg. No. 37,674.

Send all correspondence to :

Mr. Michael B. Lasky
ALTERA Law Group LLC
Patent & Trademark Attorney
Intellectual Property Law
10749, Bren Road East, Opus 2
Minneapolis, MN 55343
U.S.A.

RESPECTFULLY SUBMITTED

BY:

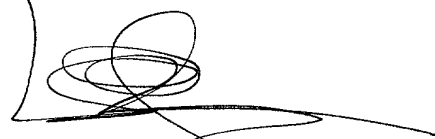
Louis-Pierre Gravelle
Registration No. 44,429

Date: May 30, 2000